


RHINO FOIL

RF-51 & RF-51B



- ✓ Satisfy BCA specifications and requirements for Reflective Foil Laminates.
- ✓ Complies with the specifications and requirements of AS/NZS 4200.1 for "Pliable Building Membranes" which is a manual recognised by the BCA Part 3.5 Roof and Cladding.
- ✓ Low Flammability Index in accordance with AS 1530.2 ≤ 5
- ✓ Satisfy BCA Part 3.7.1 Fire Hazard Properties.
- ✓ Satisfy Health and Safety Regulations.



PRODUCT INFORMATION

Rhino Foil Products are specifically manufactured to the highest industry standards.

WALL INSTALLATION - Up to R1.1 may be added to the wall system when Rhino Foil RF-51 & RF-51B is installed as a pliable building membrane behind brick veneer / other claddings with a drained cavity. Our specialised manufacturing process bonds together Aluminium Foil to a high strength reinforcing Polymer Mesh using a flame retardant adhesive. Our Reinforcing Polymer Mesh is purposely treated blue in colour to reduce reflective glare problems when Rhino Foil is installed.


RHINO FOIL USAGE

In all applications:

- External cladding should be installed A.S.A.P
- No contact is to be made with wet concrete or mortar
- Store in dry area, weather proofed only after installation
- Shrinkage of up to 2% can be expected

In reflective foil laminate applications:

- Use only in accordance with AS/NZS 4200. 2 for the "Installation Requirements for Pliable Building Membranes"
- Minimum of 20mm air space is recommended adjacent to reflective foil face to achieve maximum insulation values

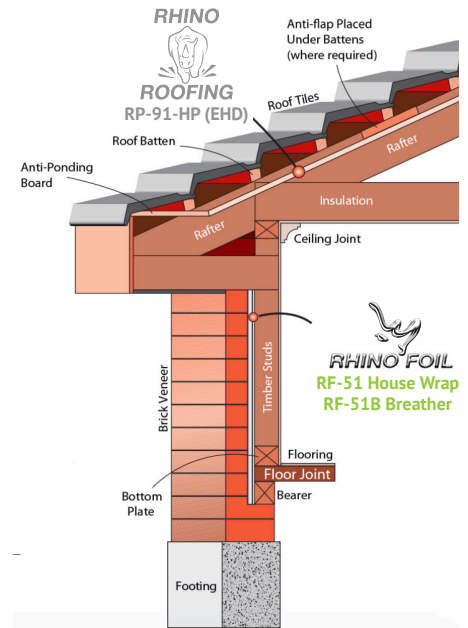

FIRE PERFORMANCE

Bushfire Attack Level

Rhino Foil RF-51 & RF-51B is suitable for BAL 12.5 to FZ as per AS3959, section 3.10, except in exposed installations.

LIGHT WEIGHT SUPER STRENGTH HOUSE WRAP RF-51 RF-51B

THE ULTIMATE PROTECTION

Proudly Manufactured by
Thor Building Products P/L

☎ 1300 880 828

✉ sales@thorbuilding.com.au

🌐 www.thorbuilding.com.au

Recommended Applications and Properties

	RF-51	RF-51B
Residential Wall Insulation	✓	✓
Commercial Wall Insulation	✓	✓
Duty	Medium	Medium
Vapour Classification (VCM)	Class 1, Vapour Barrier	Class 3, Vapour Permeable
Emittance	Reflective (≤0.05)	Reflective (≤0.05)
Water Control Classification	Water Barrier	Non-Water Barrier
Flammability Index	Low (≤5)	Low (≤5)
Tensile Strength Machine Direction (kN/M)	min 9.5	min 9.5
Tensile Strength Lateral Direction (kN/M)	min 6.0	min 6.0
Edge Tear Resistance Machine Direction (N)	min 65	min 65
Edge Tear Resistance Lateral Direction (N)	min 65	min 65
Water Vapour Transmission Rate (Ng/Ns)	max 2	min 140
Emittance of Reflective Face	max 0.05	max 0.05
Electrical Conductivity	Conductive	Conductive
Availability		
Width 1350mm Length 30m Area 40.5m ²	✓	✓
Width 1350mm Length 60m Area 81m ²	✓	✓

Thor Building Products Pty Ltd reserves the right to change product specifications without prior notice. Information in this publication and otherwise supplied to users as to the subject product is based on our general experience and is given in good faith, but due to the many particular factors which are outside our knowledge and control and affect the use of products, no warranty is given or is to be implied with respect to either such information or the product itself, in particular the suitability of the product for any particular purpose. The purchaser should independently determine the suitability of the product for the intended application. For the most current version of this publication refer to our website <https://thorbuilding.com.au/downloads>.